

# Brick.

E: sales@qcg.co.nz | W: www.qcg.co.nz | P: 0800 525 585



Brick tile series...the ultimate collection of fashionable, popular colours in the top selling 100x300 format. This collection from Spain fits with many of today's decors, and offers a premium high quality glaze suitable for all wall tiling applications. Follow traditional patterns and install with a brick bond format, or modernize with the stacked, layered or herringbone effect.

**PRODUCT TYPE:** Glazed Ceramic

**COLOURS:** See colour options overleaf

**SIZES<sup>(1)</sup>:** 100x300

**SURFACES:** Matt/Gloss (Brillo)

**EDGES:** Pressed

**USAGE:** Wall use only

**TECHNICAL INFO:** See overleaf

**VARIATION<sup>(3)</sup>:** V1

**WARRANTY<sup>(3)</sup>:** 15 Years


**ORIGIN:** Spain

(1) Sizes are nominal and may include a grout joint. (2) Variation is an inherent property of tiles and stone. (3) If further details are required regarding our warranty or terms please contact our team on sales@qcg.co.nz or 0800 525 585

# Brick.

E: sales@qcg.co.nz | W: www.qcg.co.nz | P: 0800 525 585


## COLOURS:

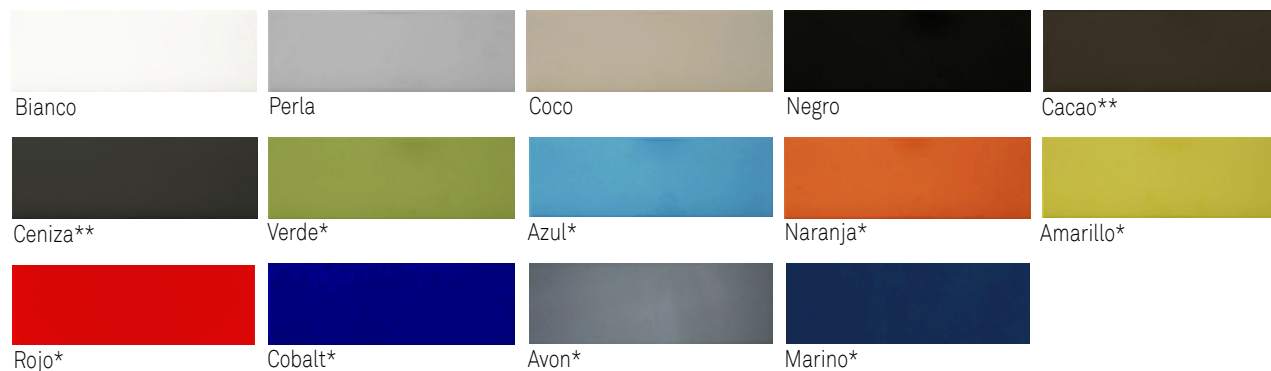

\*Only available in Brillo (Gloss)









\*\*Only available in Matt

## SIZES:



## TECHNICAL CHARACTERISTICS STANDARD VALUE

Compliant with standards EN 14411 annex G group Bla. Compliant with standards ISO 13006 annex G group Bla.

	Water absorption	EN ISO 10545-3	3-5%
	Frost Resistance	EN ISO 10545-12	✓
	Chemical resistance	EN ISO 10545-13	✓
	Size variation	EN ISO 10545-2	+/- .5%
	Thickness	-	7mm
	Hardness (MOHS)	EN 101	-
	Slip resistance	AS/NZS 4586:2013	-
	Breaking Strength	EN ISO 10545-4	-