

Deepstone.

QUANTUM
TILES. STONE. CORK.



Deepstone is a striking fusion of mineral influences, where the rich, dark tones of Ligurian slate meet the warm, multicoloured hues of Brazilian stone. This unique stone-effect surface features carefully balanced patterns and nuanced colour gradations, evoking an organic, earthy elegance.

PRODUCT:	Glazed porcelain
APPLICATION:	Floor and wall
VARIATION ⁽¹⁾ :	V3
WARRANTY ⁽²⁾ :	15 Years
ORIGIN:	Italy

(1) This reflects the level of variation in the tone or pattern. V1 being no variation, and V4 being very high variation. (2) If further details are required regarding our warranty or terms - please contact our team on sales@qcg.co.nz or 0800 525 585.

Deepstone.

TECHNICAL		STANDARD	VALUE		
Compliant with standards EN 14411 annex G group Bla. Compliant with standards ISO 13006 annex G group Bla.					
	Water absorption	EN ISO 10545-3	<0.5%		
	Frost Resistance	EN ISO 10545-12	✓		
	Chemical resistance	EN ISO 10545-13	✓		
	Size variation	EN ISO 10545-2	-		
	Thickness	-	6mm	9mm	20mm
	Edges	-	Rectified		
	Hardness (MOHS)	EN 101	-		
	Faces (may differ between formats)	-	12		
	Breaking Strength	EN ISO 10545-4	-		
	Slip Resistance		Natural	Anti-slip	
		DIN 51130 (R) *	R10	R11	
		AS/NZS 4586:2013 (SRV)	-	-	
		Average BP (P)	-	-	

BPIR (Building Product Information Requirements)

B2.3.1.(c) (i) and (ii); Quantum tiles have a durability performance warranty of 15 years once installed according to accepted industry tiling standards. This includes the surface glazes and composition of the tile itself.

C3.4 (a) and (b); Quantum tiles remain non-combustible and resistant to all potential fire hazards. They meet Group 1-S for all applications and surpass the min Critical Radiant Flux 4.5kW/m2.

D1.3.3 (d); All Quantum tiles noted as 'Slip-resistant', 'Structured', 'Grip' or 'Anti-Slip', will meet minimum SRV (Slip Resistance Value) measures that comply with the building code (NZBC) for 'Access Routes' under normal conditions of use. These tiles are tested and verified in New Zealand using accredited agencies with test reports readily available.

E3.3.3, E3.3.4, E3.3.5, E3.3.6; All Quantum 'glazed' or 'full or colored body' ceramic and porcelain tiles remain an 'acceptable surface solution', and provide an impervious surface on both floors and walls. All floor tiles and the majority of all wall tiles achieve a maximum of 6% water absorption. Where water absorption is greater than 6% - please note; There must be no cracks or damage to the glaze, and grout in joints must reach the glazed surface and be waterproofed to restrict and seal against the permeation of water. Water absorption values are stated in the technical data above.

F2.3.1; Quantum tiles do not pose any health hazard or give rise to any harmful concentrations at the surface of the material where the material is exposed.

Quantum tiles are very resilient and have few limitations. They are highly resistant to normal wear, sun, UV, and moisture however there are some conditions to consider;

- External tile applications will be limited to porcelain for low water absorption to ensure integrity in frost conditions.
- Full immersion applications, i.e., pools, will be limited to porcelain or specific pool-rated ceramic tiles.
- Dropping of any heavy items i.e., hammers, pots/pans etc, may chip or crack the surface. This is not considered wear and tear.




For areas requiring slip-resistance, the suitable surface must be selected and installed in accordance with the NZ Building Code (NZBC) to ensure the surface remains safe and fit for purpose.

Regular cleaning and maintenance of the surface will maintain hygienic surface conditions and retain any textural or slip-resistant properties. Please refer to our 'Maintenance and Care Guide' for directions and recommendations on regular cleaning routines.

Tiles must be installed according to the AS Acceptable Tiling Standards Guide by professional installers who have this available and can guarantee their workmanship.

Quantum carries the responsibility and liability for this collection as legal entity; Quantum Importing and Distribution Limited. PO Box 8044, Palmerston North 4412.

FORMATS:

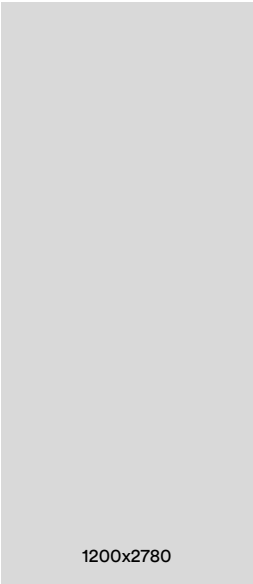

COLOURS:



Deepstone.

COLLECTION:

THICKNESS	6mm		9mm						20mm			Stick Mosaic	
COLOUR	1200x2780	1200x1200	600x1200		600x1200	1000x1000	600x600		1200x1200	600x1200	1000x1000	600x600	300x300
	Natural	Natural	Natural	Anti-slip	3D Peak	Natural	Natural	Anti-slip					Natural
Lunar	•	•	•		•	•	•		•	•		•	•
Sand	•	•	•		•	•	•	•	•	•	•	•	•
Iron	•	•	•	•		•	•	•	•	•		•	•
Taupe		•	•	•	•		•			•		•	•
Oyster		•	•			•	•			•	•	•	•
Graphite	•	•	•				•			•		•	•

